

Miniature Pushbutton Switches ESD proof, waterproof





Specifications:

Contact rating:	20 V AC, 0,4 VA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 30 °C to + 85 °C
Mechanical life:	minimum 50 000 operations
Contacts:	gold-plated over nickel barrier
Terminals:	solder tags or PC terminals
Material:	case: PA / PES meets UL 94 V-0, washable button: PA meets UL 94 V-0, washable
Protection:	IP 67
Mounting:	bushing \varnothing 6,35 mm with locking plate or on pc-board
Soldering conditions:	hand-soldering – max.: 5 sec, 350 °C auto-soldering – max.: 10 sec, 260 °C
ESD resistance:	> 10 kV (between button and terminals)

Models: Switching functions




S P D T

MPME 1FB-ESD on – mom

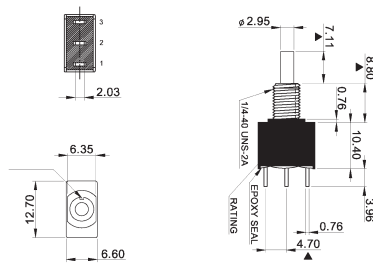

S P D T

MPME 1FB-PC ESD on – mom

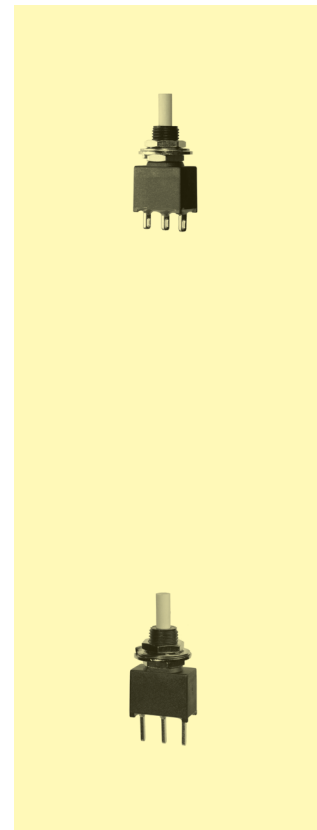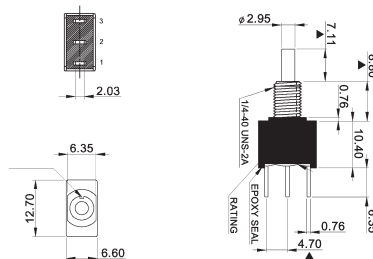

knitter-switch

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk