

Microminiature Pushbutton Switches ESD proof




Specifications:

Contact rating:	max. 28 V DC, 0,4 VA min. 20 mV DC, 1 μ A
Contact resistance:	< 100 m Ω
Insulation resistance:	> 500 M Ω at 250 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 40° to + 85° C
Mechanical life:	minimum 30 000 operations
Contacts:	phosphor bronze, gold-plated
Terminals:	PC terminals, crimped, phosphor bronze gold-plated
Material:	case and button: PES, meets UL 94 V-0, washable
Mounting:	on pc-board
Soldering conditions:	auto-soldering – max.: 7 sec, 250° C \pm 5° C max.: 5 sec, 270° C \pm 5° C
ESD resistance:	> 8 kV (between button and terminals)

Accessories:

Plastic caps

black	KF 4105
grey	KF 4107
red	KF 4109
white	KF 4110



Models:



Switching functions: when looking at the brand name, the normally closed contact is on the right hand side.

washable

S P D T

FP 1 F – RA



mom – on

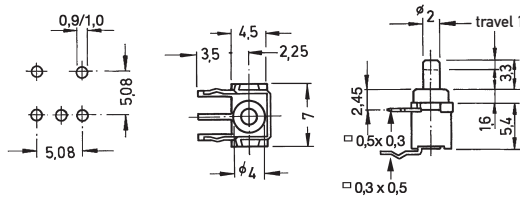

D P D T

FP 2 F – RA

mom – on

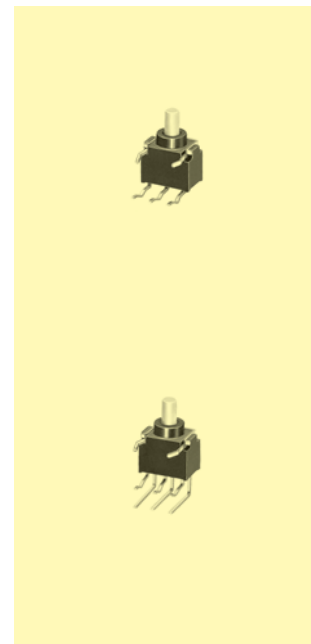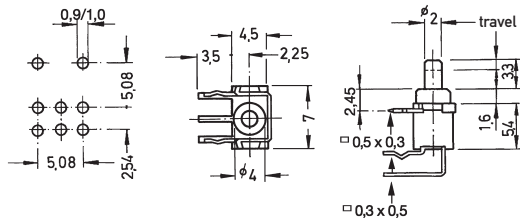

knitter-switch

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk