


Miniature Slide Switches

Specifications:


Contact rating:	125 V AC, 100 mA / 60 V DC, 100 mA
Contact resistance:	< 10 mΩ
Insulation resistance:	> 1000 MΩ, at 500 V DC
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 30 000 operations
Operating temperature:	- 45° to + 85° C
Contacts/Terminals:	PC terminals, copper alloy with 2 μ gold-plating over 3 μ nickel barrier
Material:	case: diallyl-phthalate, cover and slide: Noryl SE 0
Mounting:	on pc-board
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C hand-soldering – max.: 20 W, 5 sec, 270° C

Models: Switching functions



SPDT
MSS 101 DB on – on

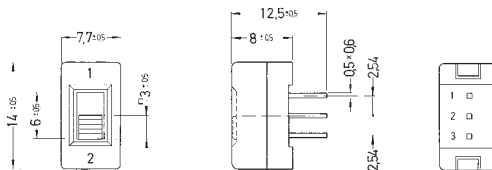

SPDT
MSS 111 DB on – on

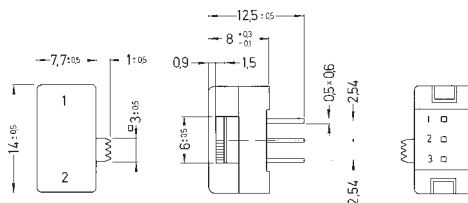

DPDT
MSS 201 NB on – on

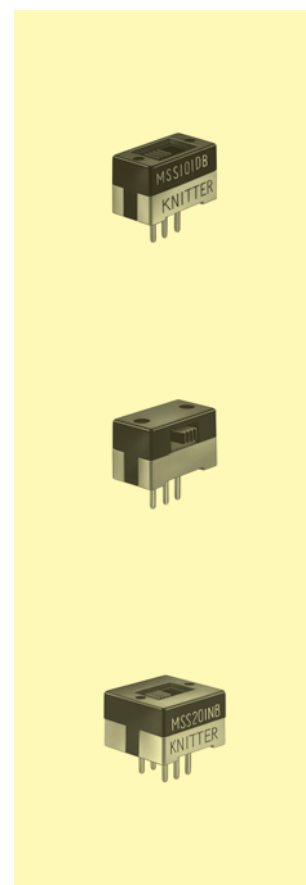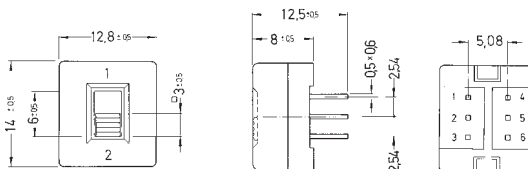




Miniature Slide Switches

Specifications:


Contact rating:	250 V AC, 1 A / 120 V AC or 28 V DC, 3 A
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40° to +85° C
Mechanical life:	minimum 20 000 operations
Material:	Actuator: nylon, black Case: nylon, black Base: nylon, white
Contacts/Terminals:	copper alloy, silver-plating
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models: Switching functions



MSS 3011 D on – on

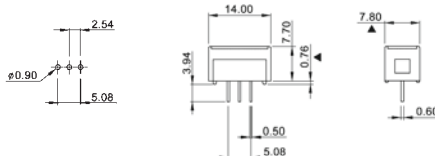


MSS 3112 D on – on

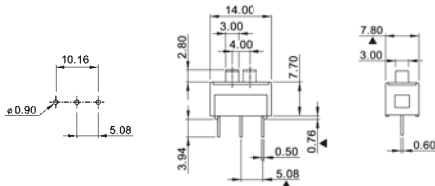

MSS 3121 N-R on – on

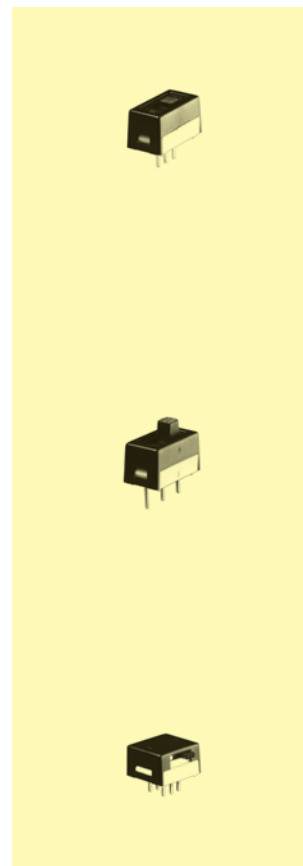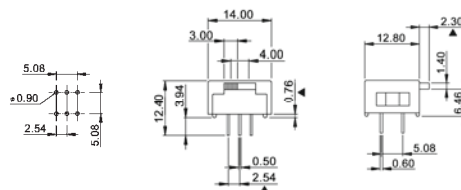

Ordering code:

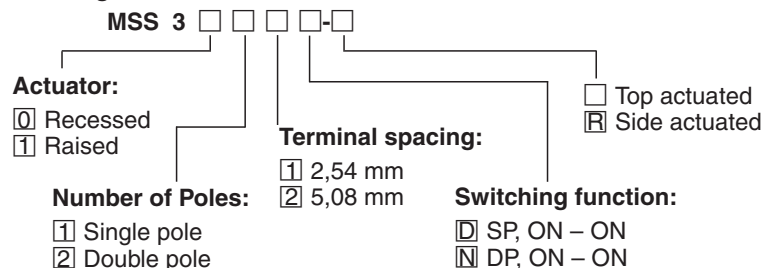

knitter-switch

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk