


Dual-in-line Switches for SMT





Specifications:

Contact rating:	24 V DC, 25 mA / 6 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 40° to + 85° C
Mechanical life:	minimum 2000 operations per pole
Material:	PPS meets UL 94 V-0
Contacts:	gold-plated over nickel
Construction:	case sealed, slide recessed, front sealed with protective tape
Mounting:	on pc-board – SMD
Slide position:	OFF

Models:


Series SBS 1000

Type	Poles	Length (A)
SBS 1001	1	3,48 mm
SBS 1002	2	6,02 mm
SBS 1003	3	8,56 mm
SBS 1004	4	11,10 mm
SBS 1005	5	13,64 mm
SBS 1006	6	16,18 mm
SBS 1007	7	18,72 mm
SBS 1008	8	21,26 mm
SBS 1009	9	23,80 mm
SBS 1010	10	26,34 mm

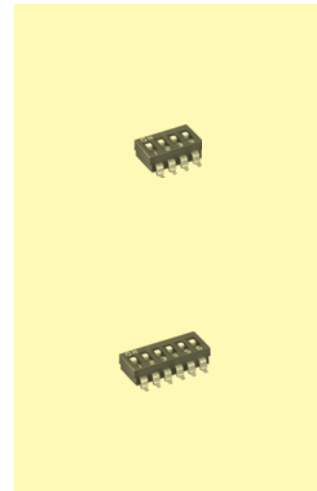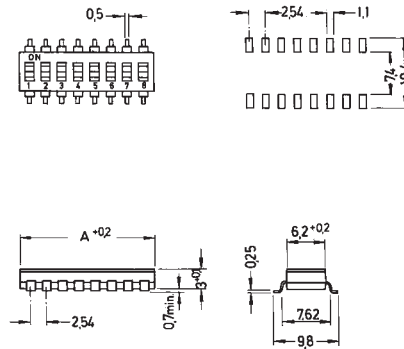

Packing: sticks or tapes
for order on tapes: additional to type number: T
example of order: SBS 1002 T

Models:	Stick	Tape/Reel	Tape width (A)
SBS 1001	–	800 pieces; Ø 330 mm	16,0 mm
SBS 1002	76 pieces	900 pieces; Ø 330 mm	16,0 mm
SBS 1003	55 pieces	900 pieces; Ø 330 mm	24,0 mm
SBS 1004	42 pieces	900 pieces; Ø 330 mm	24,0 mm
SBS 1005	35 pieces	900 pieces; Ø 330 mm	24,0 mm
SBS 1006	28 pieces	900 pieces; Ø 330 mm	24,0 mm
SBS 1007	25 pieces	900 pieces; Ø 330 mm	32,0 mm
SBS 1008	22 pieces	900 pieces; Ø 330 mm	32,0 mm
SBS 1009	20 pieces	900 pieces; Ø 330 mm	44,0 mm
SBS 1010	18 pieces	900 pieces; Ø 330 mm	44,0 mm



knitter-switch

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk