

Subminiature Rotary Coded Switches




Specifications:

Contact rating:	24 V DC, 25 mA switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 25° to + 70° C
Mechanical life:	minimum 2000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PBT blue, meets UL 94 V-0, washable, rotor: white; inverse type red
Mounting:	on pc-board
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C

Models: Code


DRS 20010	BCD				
DRS 20110	BCD Inverse				
DRS 20016	Hexadecimal				
DRS 20116	Hexadecimal Inverse				
DRS 21010	BCD				
DRS 21110	BCD Inverse				
DRS 21016	Hexadecimal				
DRS 21116	Hexadecimal Inverse				
DRR 20010	BCD				
DRR 20110	BCD Inverse				
DRR 20016	Hexadecimal				
DRR 20116	Hexadecimal Inverse				
DRR 21010	BCD				
DRR 21110	BCD Inverse				
DRR 21016	Hexadecimal				
DRR 21116	Hexadecimal Inverse				


Special version:



Spacing 2,54 mm
 Additional to type number: -1
 Example of order: DRR 20010-1

washable

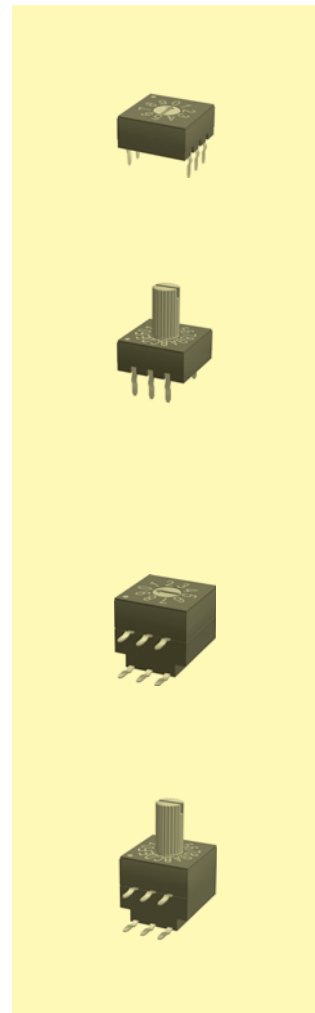



Subminiature Rotary Coded Switches for SMT


Specifications:

Contact rating:	24 V DC, 100 mA switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 25° to + 70° C
Mechanical life:	minimum 2000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PBT black, meets UL 94 V-0, washable, rotor: white; inverse type red
Mounting:	on pc-board


washable

Models: Code

SMR 20010 BCD
 SMR 20110 BCD Inverse

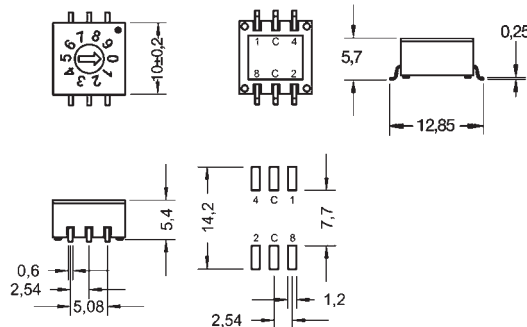

SMR 20016 Hexadecimal
 SMR 20116 Hexadecimal Inverse

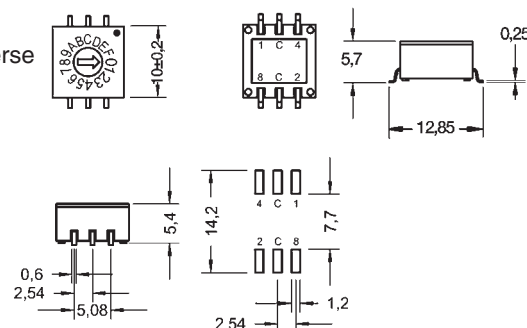

Packing: 700 pieces per reel

knitter-switch

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk