

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk

VIBRATION TYPE LEVEL SWITCH Model **KVX/XV2**

**HIGHLY SENSITIVE & COMPACT VIBRATION LEVEL SWITCH
MEETING DEMANDING PROCESSES AS WELL AS
HARD REQUIREMENTS**

DETECTING HYPOBARIC POWDER;


Standard Type can detect an object of apparent specific gravity from 0.1 or over while
Optional Type can do one from 0.03 or over.



**Reliably Detect Any Materials Whose Specific Conductivity
Or Electrical Properties May Be Varied. Because The Sensitivity Is At
The Tip Of The Sensing Plate, It May Not Be Affected By Fouling Or Build-Up At
The Plate-Root. With The Development Of New Mechanism And
New Circuitry, It Has Greatly Been Upgraded In
Terms Of Sensitivity And Reliability**


Distributor: Sider Electronic Industries Ltd.
 Tel: 852-23892522 Fax: 852-23574546
 Email: info@sider.com.hk URL: www.sider.com.hk

APPLICABLE TO POWDER WHOSE DETECTION IS DIFFICULT DUE TO THE SMALL APPARENT SPECIFIC GRAVITY, AND YET IT IS USER-FRIENDLY.

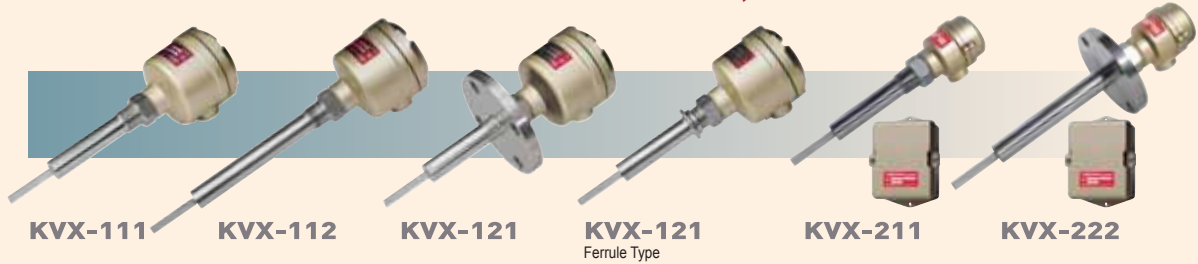

KVX SERIES FEATURES


- Well suited to detection of such small-gravity powders that other instruments can not measure.
- Applicable to an object whose conductivity or specific gravity varies.
- Simple operation without complex sensitivity adjustment.
- Easy maintenance with few driving parts.
- Pressure resistant with no sealing part.
- Highly sensitive to detect fine and light powders. (Specific gravity : more than 0.1) (Specific gravity : 0.03, available as option)
- Applicable to liquids.
- A remote box is prepared as a vibration countermeasure.
- An operating lamp is fixed.
- 2 types of L dimension = 180mm, 250mm

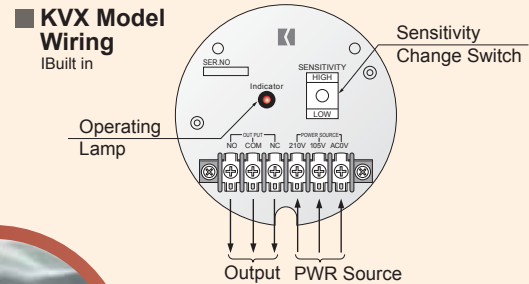

PRINCIPLE OF OPERATION

When an object gets in touch with a rod oscillated by piezoelectricity, vibration damping takes place. This damping is transferred to a relay output.


Lightweight/Compact/Quality Level Switch !!

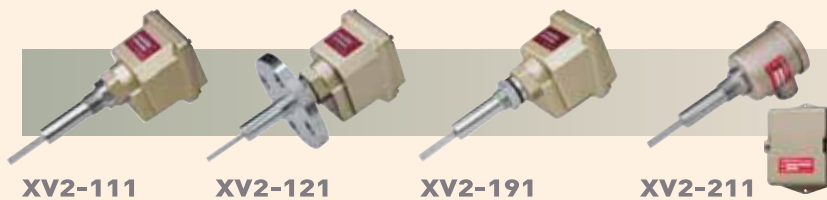

XV2 SERIES FEATURES

Besides the same performance as that of KVX series, it is compact and lightweight. It is the level switch developed to meet the downsizing requirements in particular.

■ XV2 Model Wiring Built-in

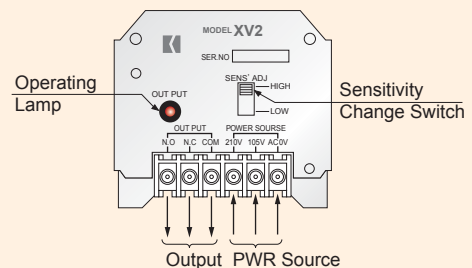

Distributor: Sider Electronic Industries Ltd.
Tel: 852-23892522 Fax: 852-23574546
Email: info@sider.com.hk URL: www.sider.com.hk


KVV Standard Model & Specification												
	Model	KVV-111	KVV-211	KVV-112	KVV-121	KVV-122	KVV-222					
Installation	R1	R1	R1	JIS10K50A	JIS10K50A	JIS10K50A						
Conduit	G 3/4	G 1/2	G 3/4		G 1/2							
Sensitivity	Specific Gravity over 0.1 (over 0.03 as option)											
Sens. Adjustment	2 sensitivity Levels (Switchable H & L * L level at factory setting)											
Contact Capacity	250VAC 10A (30VDC 10A)											
Power Source	105 / 210VAC ±10% (24VDC as option)											
Consumption	4VA											
Pressure	980kPa											
Temp. inside	-20°C ~ +80°C (No condensation)											
Ambient Temp	-20°C ~ +60°C (No condensation)											
Rod Materialial	304SS (316LSS as option)											
Housing Materialial	ADC											
Cable Length	—	4m (10m as option)	—	—	—	4m(10m as option)						
Protection Rank	IP-66	IP-55 equivalent	IP-66		IP-55 equivalent							
Angle Rod	Can be available (KVV-□□□-3)											
Sensitivity Volume	Can be available (Optional)											
Fouling Protection	Can be available (Optional)											
Detect sediments in water	Can be available (depending on condition)											
Weight	1.4Kg	1.0Kg	1.5Kg	3.6Kg	3.7Kg	3.4Kg						

*Note: Flange and Ferrule are not weldable.


XV2 Standard Model & Specification								
	Model	XV2-111	XV2-191	XV2-121	XV2-211			
Installation	R 3/4	G 3/4	JIS10K50A	R 3/4				
Conduit	G 1/2							
Sensitivity	Specific Gravity over 0.1 (over 0.03 as option)							
Sens. Adjustment	2 sensitivity Levels (Switchable H & L * L level at factory setting)							
Contact Capacity	250V AC 5A (30V DC 5A)							
Power Source	105 / 210VAC ±10% (24VDC as option)		105V / 210V AC ±10%					
Consumption	4VA							
Pressure	980kPa							
Temp. inside	-20°C ~ +80°C (No condensation)							
Ambient Temp	-20°C ~ +50°C (No condensation)							
Rod Materialial	304SS (316LSS as option)							
Housing Materialial	ADC			AC				
Cable Length	—	—	—	4m				
Protection	IP-55 equivalent							
Angle Rod	Can be available (XV2-□□□-3)							
Sensitivity Volume	Not available							
Fouling Protection	Not available							
Detect sediments in water	Not available							
Weight	1.0Kg	3.3Kg	0.8Kg					

* Note: Flange and Ferrule are not weldable.

■ KVV/XV2 REMOTE MODEL

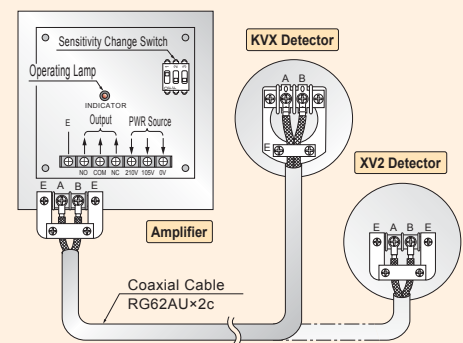


■ KVV/XV2 OUTDOOR WALL MOUNTING

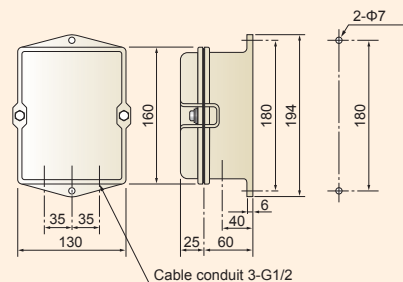

Color : Hammer-net gold
Weight : 1.7kg

DESIGNATION OF MODEL

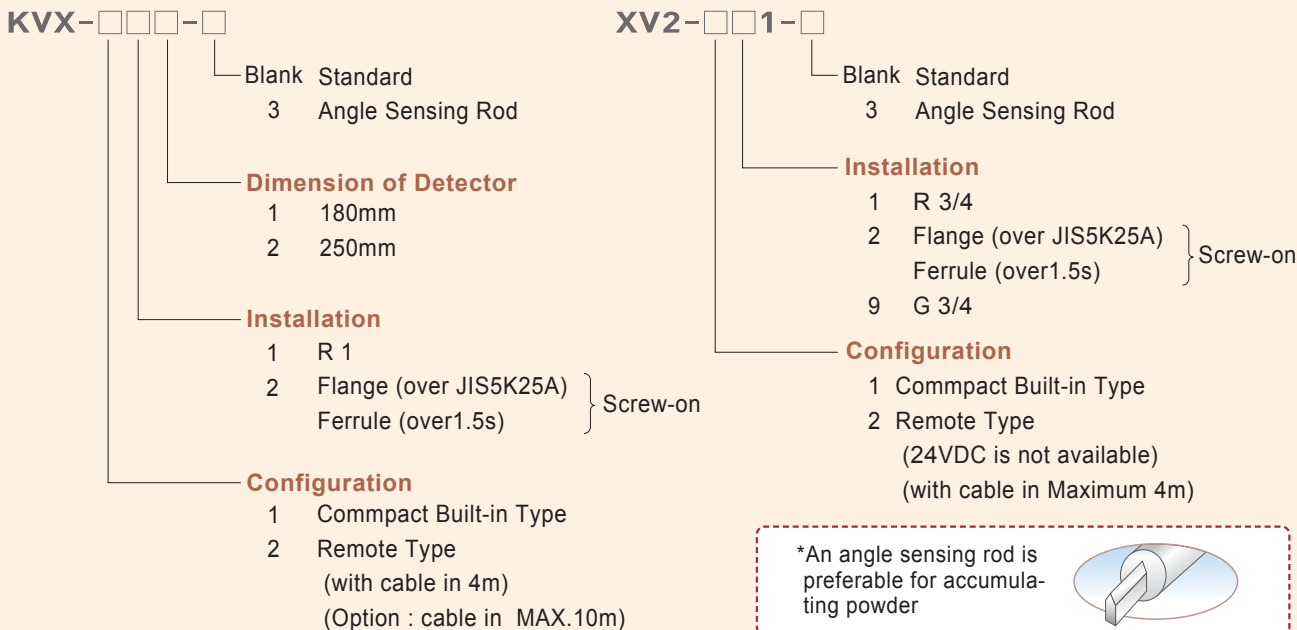

● NOTES FOR INSTALLATION

In case of horizontal mounting, make the cable conduit directly downward in both Flange and Screw mounting Types. An arrow on a hexagonal nut between the housing and the screw shows the mounting direction (KVX only). Make this arrow up on the hexagonal nut, while the conduit should face directly underneath. When screwing, so as to the correct direction, adjust the finishing angle with increasing or decreasing a thickness of sealant tape. When screwing, you should make the last angle adjustment within a 360 degree roll in rolling the seal tape up or down.

Apply an effective sealing material on the screw when you fix it. The detection rod must be completely protruded inside the tank. Do not rotate the level switch with housing but with the hexagonal nut by spanner or wrench when you screw in the instrument.

Line of business

- Rotary Paddle Type Level Switch
- Vibration Type Level Switch
- Swing Type Level Switch
- Acoustic Level Switch
- Capacitance Type Level Switch
- Capacitive Proximity Sensor
- Capacitance Type Level Indicator
- Diaphragm Type Level Switch
- Tiit Switch
- Leak Type Level Switch
- Microwave Switch
- Sounding Bob Type Level Indicator
- Flow Switch
- Conductance Type Level Switch
- Float Switch
- Float Type Level Indicator
- Ultrasonic Type Level Indicator
- Equipments For Conveyor Lines
- Dust Monitor System
- Zirconia Oxygen Analyzer
- Laser Type Level Indicator
- RADAR Type Level Indicator
- On-line Sensors for Accurate Liquid Analysis
- Ultrasonic Flow meter

Nuclear Power Generation to Rice Milling
 All-round Manufacturer of Level Controllers for Powder, Granules and Liquid

KANSAI Automation Co., Ltd.



Design, development, and manufacture of level measuring sensors

*Please be sure to read USER'S GUIDE, Installation & Operation Instructions before using the instrument.
 *The specifications herein may be subject to change without advance notice.

Agent