




# Miniature Slide Switches

## Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 260° C ± 5° C

Models:	Operating positions	Length (mm)	
		A	B




MFP 120	2	11,0	6,6
MFP 130	3	15,0	10,0
MFP 140	4	18,2	13,2
MFP 150	5	21,4	16,4



MFP 120 – R	2	11,0	6,6
MFP 130 – R	3	15,0	10,0
MFP 140 – R	4	18,2	13,2
MFP 150 – R	5	21,4	16,4



MFP 220	2	13,6	6,9
MFP 230	3	16,8	10,1
MFP 240	4	20,0	13,3
MFP 250	5	23,2	16,5
MFP 260	6	26,4	19,7

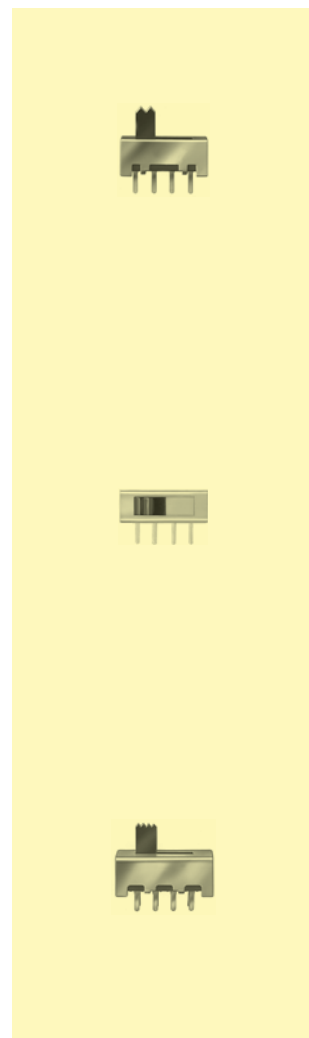




# Miniature Slide Switches

## Specifications:



Contact rating:	30 V DC, 350 mA
Contact resistance:	< 25 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 10 sec, 260° C

Models:	Operating positions	Length (mm)	
		A	B

MFP 1370	3	20,0	7,6
MFP 1470	4	20,0	9,9
MFP 1570	5	22,0	12,2



MFP 1370 – R	3	20,0	7,6
MFP 1470 – R	4	20,0	9,9
MFP 1570 – R	5	22,0	12,2

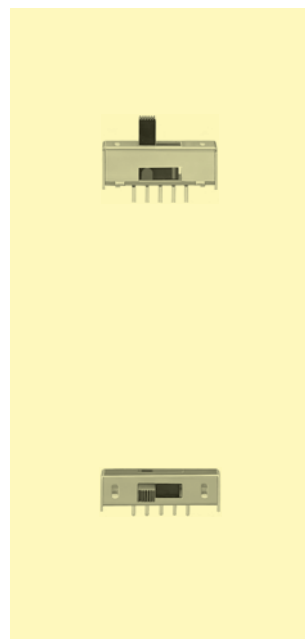



# Miniature Slide Switches


## Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	shorting (non-shorting only if specified)
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C


Models:	Operating positions	Length (mm)	
		A	B

MFP 1220  
MFP 1320  
MFP 1420  
MFP 1520  
MFP 1620

2  
3  
4  
5  
6




13,0 7,5  
15,5 10,0  
18,0 12,5  
20,5 15,0  
23,0 17,5




MFP 1220 – R  
MFP 1320 – R  
MFP 1420 – R  
MFP 1520 – R  
MFP 1620 – R

2  
3  
4  
5  
6



13,0 7,5  
15,5 10,0  
18,0 12,5  
20,5 15,0  
23,0 17,5




MFP 1323  
MFP 1424

3  
4




15,5 10,0  
18,0 12,5





MFP 1323 – R  
MFP 1424 – R

3  
4



15,5 10,0  
18,0 12,5

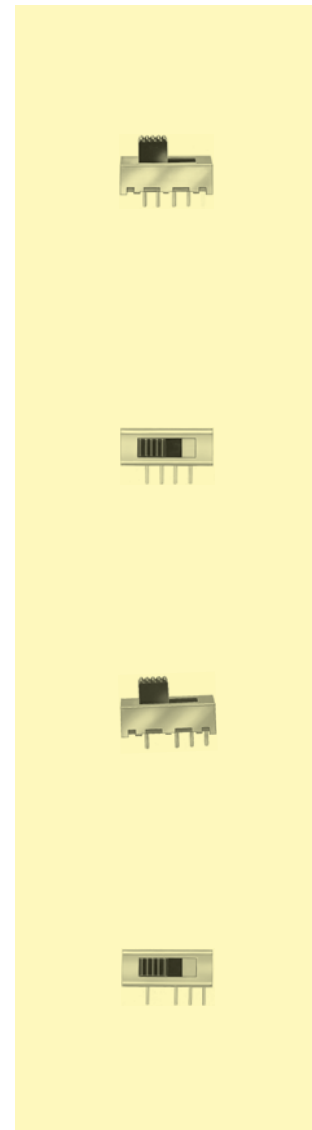



# Miniature Slide Switches






**Specifications:** see page 102

**Material:** plastic housing, terminals sealed

**Models:** Switching functions




MFP 161 D

on on






MFP 261 N

on on






MFP 263 P

on on on








MFP 461 N non-shorting

on on



MFP 661 N

on on

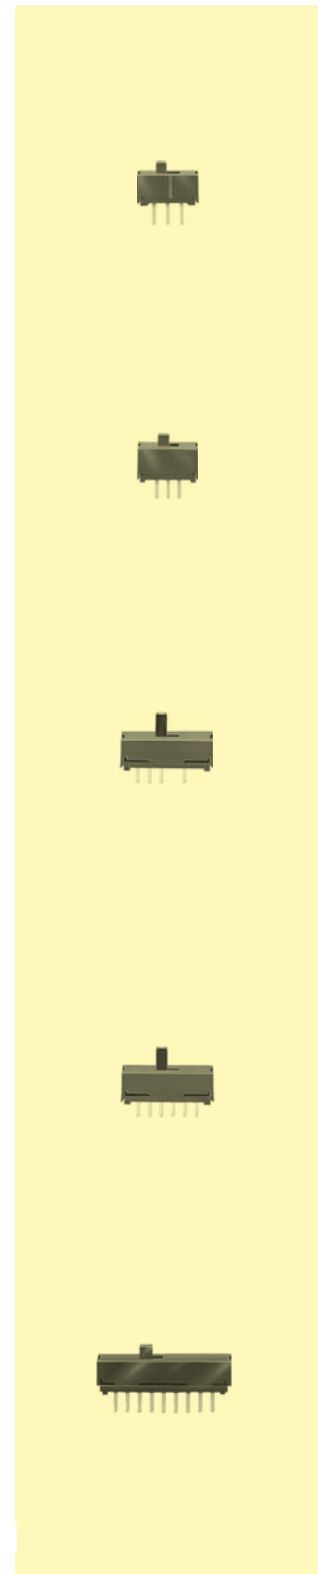




# Miniature Slide Switches

**Specifications:** see page 102


**Material:** plastic housing, terminals sealed

**Models:** Switching functions


MFP 261 N – RA on on



MFP 263 P – RA on on on



MFP 461 N – RA on on  
non-shorting




# Miniature Slide Switches

## Specifications:


Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

## Models:


	Switching functions
MFP 113 D	on on
non-shorting	

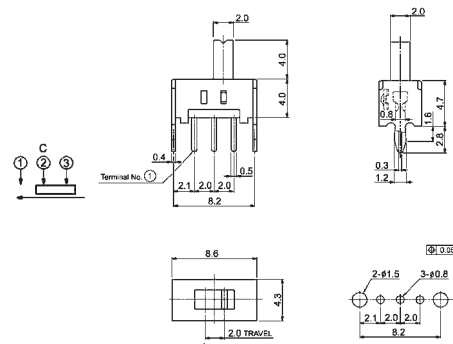

MFP 213 N	on on
non-shorting	

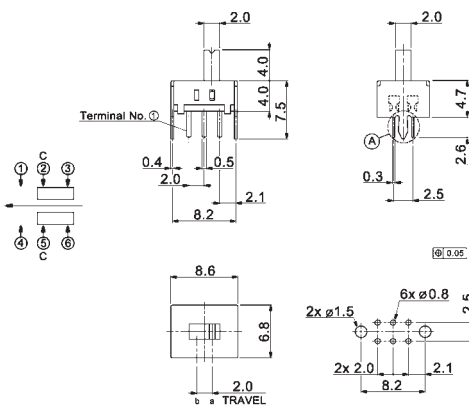

MFP 213 P	on on on
shorting	

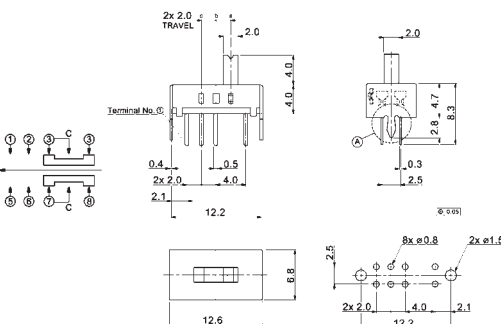




# Miniature Slide Switches

## Specifications:


Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

## Models:                      Switching functions



MFP 113 D – RA    on    on  
non-shorting

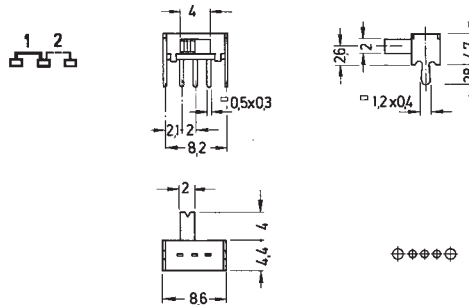

MFP 213 N – RA    on    on  
non-shorting

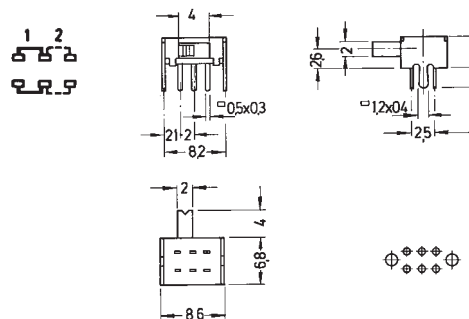

MFP 213 P – RA    on on on  
shorting

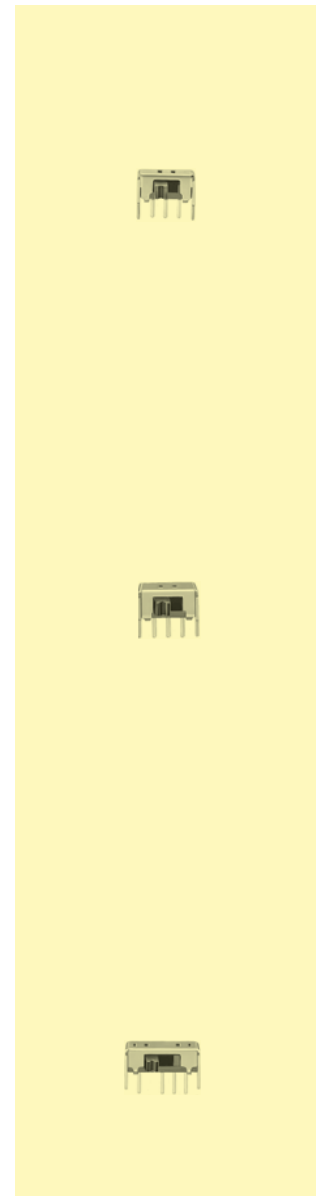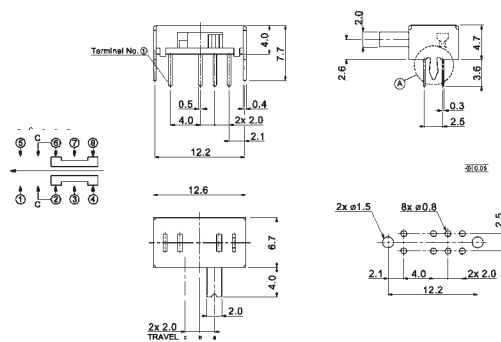






# Miniature Slide Switches

## Specifications:




Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

## Models: Switching functions



MFP 102 D      on    on






MFP 191 D      on    on



MFP 201 N      on    on



MFP 211 N      on    on

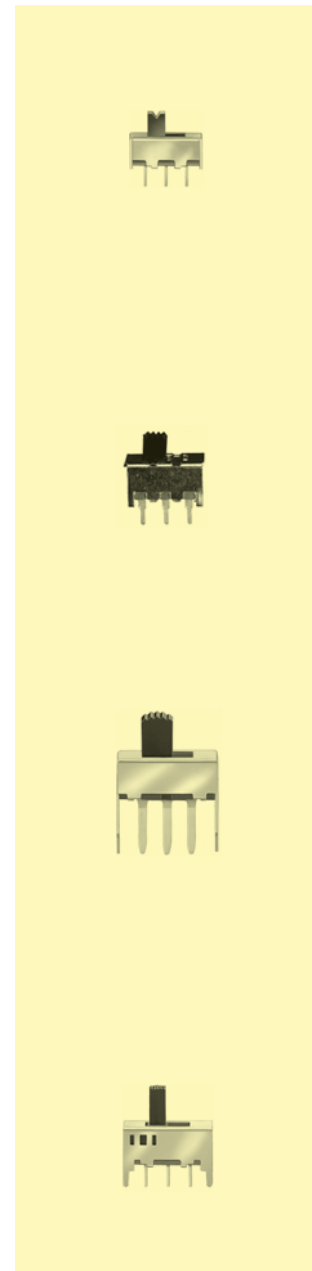




# Miniature Slide Switches

## Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC; MFPP 130 – RA: 250 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	– 20° to + 85° C
Mechanical life:	minimum 10 000 operations; MFPP 130 – RA > 100 000
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

## Models: Switching functions

MFP 121 D – RA on on




MFP 201 N – RA on on

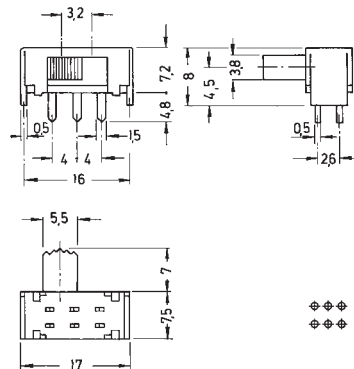

## Miniature Slide Switches/ Pushbutton Switches

MFPP 130 – RA on on on

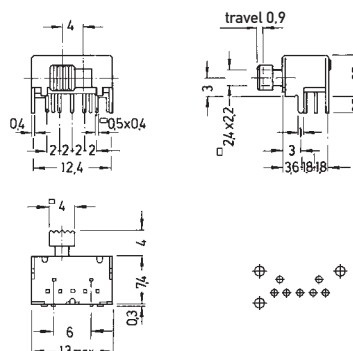

**knitter-switch**



# Miniature Slide Switches


## Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

## Models: Switching functions


MFP 221 N  
non-shorting

on on




MFP 223 P  
shorting

on on on

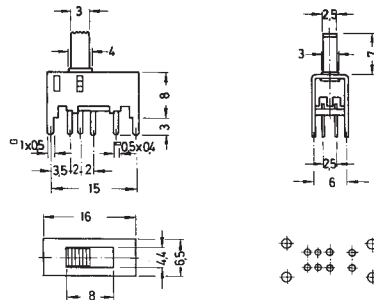



MFP 231 P  
shorting

on on on

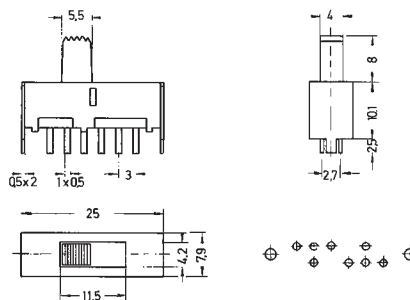

MFP 291 N  
non-shorting

on on

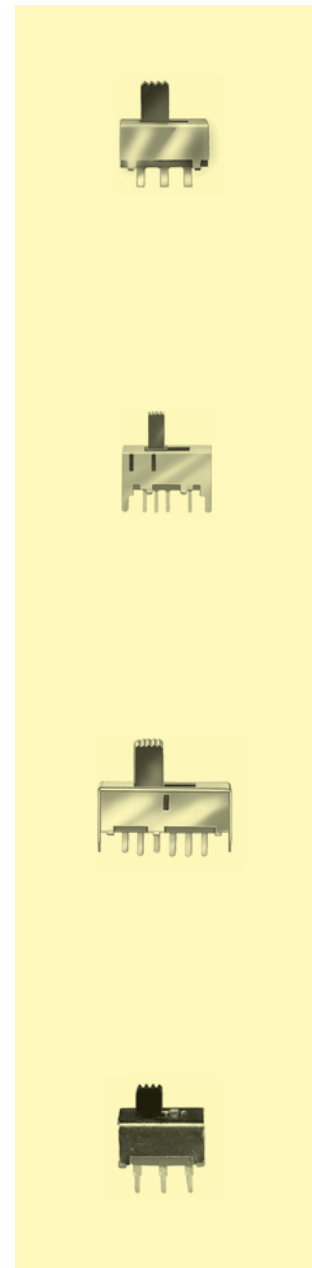



# Miniature Slide Switches

## Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	hand-soldering – max.: 5 sec, 270° C

## Models:

Switching functions


MFS 121 D  
non-shorting

on on




MFS 131 D  
non-shorting

on on





MFS 201 N  
non-shorting

on on

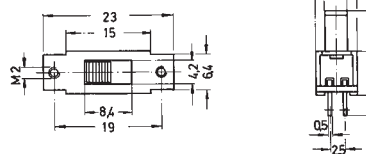

MFS 231 P  
shorting

on on on

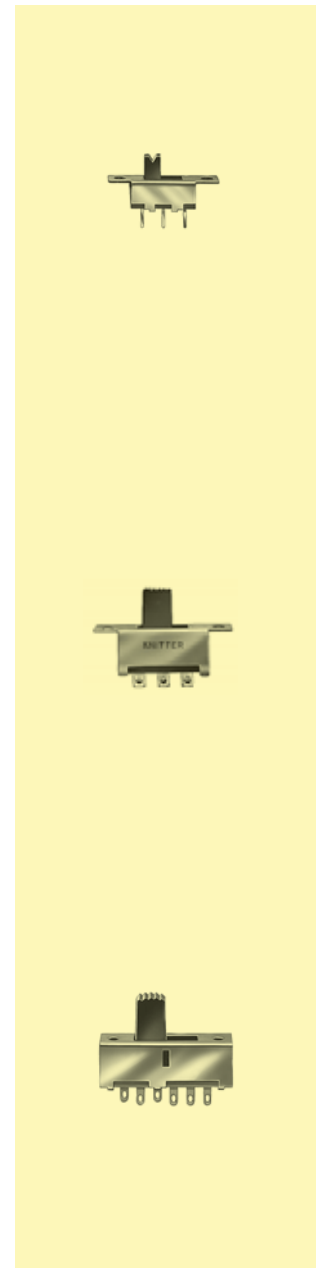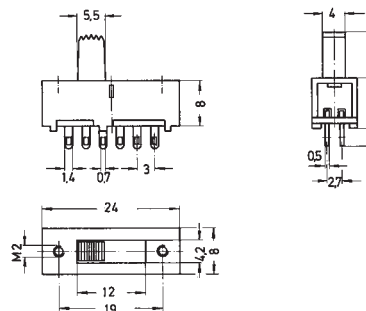

**knitter-switch**

Distributor: Sider Electronic Industries Ltd.  
Tel: 852-23892522 Fax: 852-23574546  
Email: info@sider.com.hk URL: www.sider.com.hk